

## CORTEN STEEL

Known for its unique corrosion-resistant properties, Corten steel provides containers with long-lasting durability and resistance to the elements.

## LIFTING POINTS

Easy-access lifting points make loading and unloading onto flatbed trucks easier.

## SECURITY LOCK BOX

The lock box is a bolt-on security device that protects the padlock from bolt cutters and break-in attempts.

## PAINT

The container's colour provides a professional, neutral appearance that allows it to blend easily into its surroundings.

## 2 x 6'W Flip-up windows

The two installed corrugated steel roll-up windows are each 6 ft long. They provide a quick and professional service solution for events. They are also lockable for added security.

## Heavy-duty hinges

The flip-up serving window uses two heavy-duty hinges for smooth upward opening.

## Extra lock bars

Two extra lock bars per window help keep the windows securely open and prevent accidental closure.

## Hasp lock

Added protection for the 2 windows ( padlocks not included )

## FORKLIFT POCKETS

Facilitate easy loading and unloading.

## Gas Spring Assisted Opening

Gas spring struts help lift and support the flip-up window panels for easy maneuverability.



## WEIGHT & DIMENSIONS

Exterior: 20'L x 8'W x 8'6"H  
 Interior: 19'4"L x 7'6"W x 7'10"H  
 Door Opening: 7'8"W x 7'5"H  
 Window Opening: 6'W x 3'7"H  
 Distance between windows: 68.5"L  
 Weight: 4,740 LBS  
 Payload: 62,460 LBS

## OPTIONAL ACCESSORIES




PADLOCK




STACKING PINS



ELECTRICAL ADAPTER

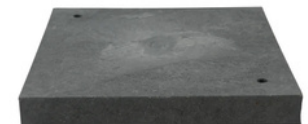

LEVELING PLATE

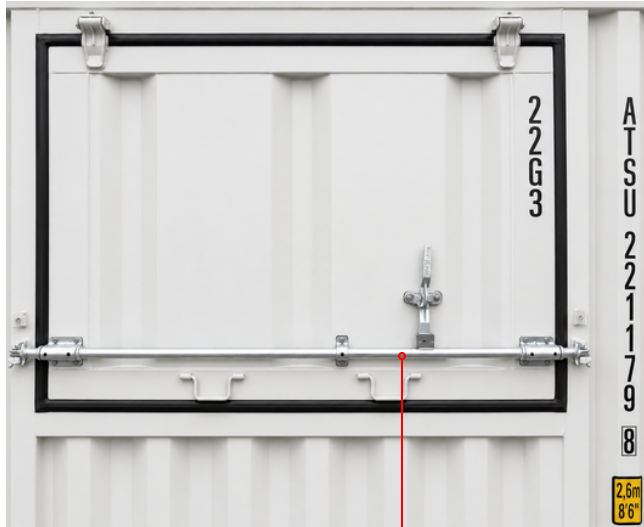

## Secure Locking System

Each Corten steel flip-up window features a steel locking bar and hasp lock for added security. Padlock not included..



## Two Large Flip-Up Windows

Two locking bars securely hold the window open and help prevent accidental closure. Two gas struts assist with opening and support the flip-up panels for easier and safer operation.



## Keruing-Apitong Wood Plywood

Marine-grade plywood with 19 plies and a thickness of 1.1 in. (28 mm). It can support a payload of up to 62,460 lb and is treated to resist spills and other contaminants.

## WEIGHT & DIMENSIONS

Exterior: 20'L x 8'W x 8'6"H

Interior: 19'4"L x 7'6"W x 7'10"H

Door Opening: 7'8"W x 7'5"H

Window Opening: 6'W x 3'7"H

Distance between windows: 68.5"L

Weight: 4,740 LBS

Payload: 62,460 LBS